


# **FARM-MAXX**

## **FTL, FTM, and FTH Series Rotary Tillers**

**Dependable Rugged Gear Drive Performance From 36 to 84 Inches**

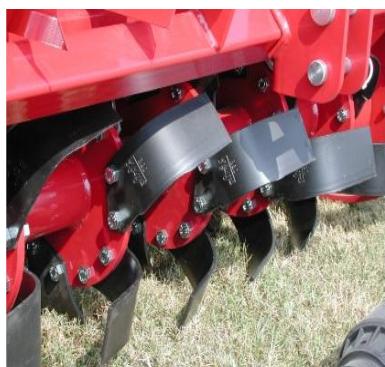

**Built tough for years of dependable, top notch service, Farm-Maxx Gear Drive Rotary Tillers are popular with professional landscapers, gardeners, hunters, small farmers, and many other demanding users. 5 models are offered from 36 to 84 inches. All feature heavy duty gear drive transmissions for rugged reliable performance year after year.**

Specifications	FTL-36G	FTL-48G	FTL-60G	FTM-65G	FTM-72G	FTH-84G
Working Width(in.)	36	48	60	65	72	84
Working Depth(in.)	7	7	7	8	8	8
Blades/Flange	6	6	6	6	6	6
Total Flanges	4	6	7	8	9	9
Total Blades	24	36	42	48	54	54
Transmission	Gear	Gear	Gear	Gear	Gear	Gear
Hitch	ASAE Cat I	ASAE Cat I/II				
Quick Hitch Compatible	Yes	Yes	Yes	Yes	Yes	Yes
PTO W/ SLIP CLUTCH	Yes	Yes	Yes	Yes	Yes	Yes
PTO SERIES	4	4	4	4	4	5
PTO Power Required (HP)	15-25	25-35	25-40	30-55	30-55	35-70
Optimum PTO Speed (RPM)	540	540	540	540	540	540
Rotor Speed (RPM)	245	242	242	241	241	241
OffSet L+R 4"	Yes	Yes	Yes	Yes	Yes	Yes
Rotor Swing Diameter(in)	14.8	14.8	14.8	17.1	17.1	18.9
Weight W/PTO LBS	392	454	496	682	738	1062

- ASAE Quick Hitch Compatible Welded Hitch
- Boron Steel Tines for Long Life
- Heavy Duty Zinc Plated Jack Stand
- Heavy Drag Board with Zinc Plated Check Chains
- Adjustable Lower Hitch Blocks

\* Unifarm reserves the right to change specifications without notice.



For more information contact:

Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: [sales@unifarm.biz](mailto:sales@unifarm.biz) Website: [www.unifarmmachinery.com](http://www.unifarmmachinery.com)